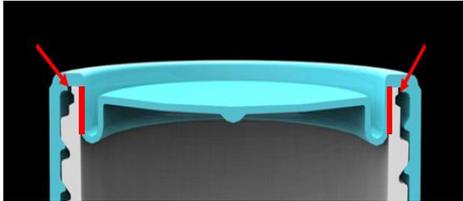
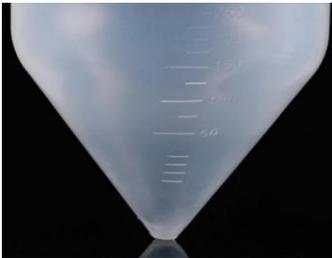



| | | |
|--------------------------------|---|--|
| Product Name: | 250 mL & 500mL Centrifuge Tubes | |
| Product Application: | <p>The 250mL/500mL centrifuge tubes can process a large number of samples at one time and are suitable for separation and harvest of large numbers of cells, supernatants, bacteria, yeast and tissue samples, therefore they are widely used in the field of life sciences and clinical experiments and can meet the requirements of biological analysis.</p> <ol style="list-style-type: none"> 1. Separation of sediments after chemical reactions for harvest and application. 2. Harvest of biomacromolecules, inorganics and organics. 3. In biochemistry and other biological fields, usually used to centrifuge and collect a large volume of cells, biomacromolecules and supernatants. | |
| Product Materials: | PP (tube) + HDPE (cap), Meets USP, Class VI standards | |
| product Specifications: | <p>Temperature range: stored at room temperature</p> <p>Shelf life: 3 Years after date of production (ensure package is in good)</p> | |
| Sterilization: | <p>Yes.</p> <p>Sterilized by E-beam, Sterility Assurance Level: SAL=10⁻⁶. The product has been irradiated and dosimetrically released based on ANSI/AAMI/ISO 11137</p> | |
| Pyrogens: | Non-Pyrogenic | |
| RNase/DNase: | DNase/RNase free | |
| BSE/TSE: | These products are deemed animal free. | |
| Performance Testing: | <p>Each manufacturing lot is sampled and tested in accordance with standard operating procedures.</p> <p>Appearance inspection: qualified Centrifugation test: qualified</p> <p>Freeze test: qualified Negative pressure test: qualified</p> <p>Packaging inspection: qualified</p> | |
| Features | <ol style="list-style-type: none"> 1. Unique structure design of the cap provides double security, further improve the seal ability. 2. Increased the thickness of conical bottom in order to improve the maximum centrifugal limit. <div style="display: flex; justify-content: space-around; align-items: center;">   </div> <ol style="list-style-type: none"> 3. Max. centrifugal limit 7000xg. 4. Tolerable temperature range: -80°C~120°C. | |

5. Clear scale for easy viewing.
6. DNase, RNase and pyrogen free.
7. Electron beam sterilization, SAL=10⁻⁶.

Product Range

| Cat. No. | Product Description | /Pack | /Case |
|----------|--|-------|-------|
| 622001 | 250mL Centrifuge Tube, Bulk, Sterilized | 6 | 102 |
| 623001 | 500mL Centrifuge Tube, Bulk, Sterilized | 6 | 36 |
| 622002 | 250mL Centrifuge Tube, PS Rack, Sterilized | 6 | 24 |
| 623002 | 500mL Centrifuge Tube, PS Rack, Sterilized | 4 | 24 |


Technical Drawing

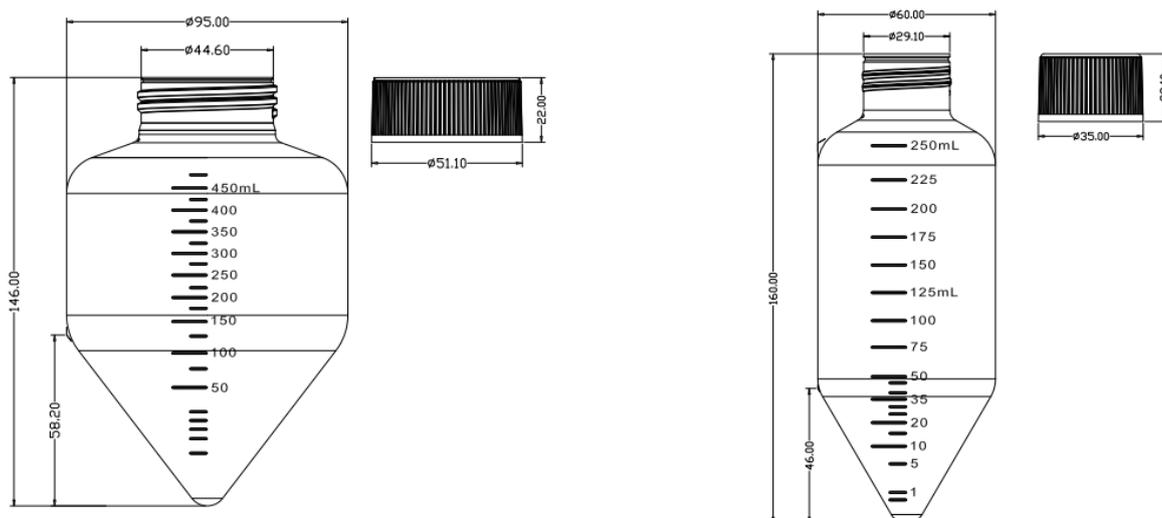

Head Office No. 530, Xida Road, Meicun Industrial Park, Xinwu District, Wuxi, Jiangsu, China
 Tel: +86+ 510-6800 6788 Email: info@nest-wuxi.com
 Online: www.cell-nest.com

Oversea NEST USA (New Jersey/ Phoenix)
 NEST scientific 株式会社 (Yokohama, Japan)
 NEST Scientific Europe B.V (Netherlands)
 Nest Scientific (MENA) FZE (Sharjah, United Arab Emirates)

500ML

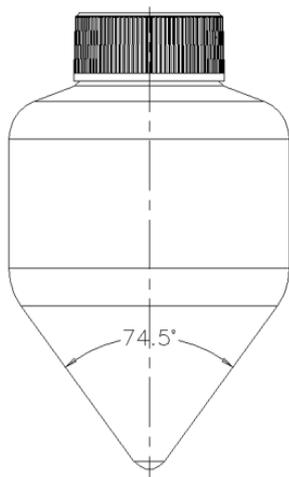

250ML

