

MBINT-100 / MBINTD-100 Thermo Shaker Incubator

MBINT-100 / MBINTD-100 thermo shaker incubator for tubes adopts DC brushless motor and microcomputer control technology, and combines the two functions of constant temperature and shaking, which greatly shortens the time of experimental operation and improves work efficiency. It is an ideal automation tool for sample incubation, catalysis, shaking and preservation. MBINTD-100 thermo shaker incubator for tubes also has multi-mode functions such as heating, cooling, and shaking to meet the needs of different users.



MBINTD-100



MBINT-100

LCD

LCD displays time and speed; it's easy to accurately set and reproduce experimental conditions.

Self-recovery

Power failure self-recovery function, the device can automatically resume operation according to the originally set procedure after power failure recovery. The experimental conditions are consistent and the results are stable.

Accurate Temp. Control

Microprocessor control, good temperature control linearity, temperature control accuracy of ± 0.5 °C. Accurate temperature control improves experiment repeatability.



Mixing orbit 2 mm, coordinating the shaking speed, forms a 2D mix and has an excellent sample mixing ability.



Multiple safety protection functions, conforming CE safety standards, safe and reliable.

Customizable Block

Various standard sample blocks are available, which is easy to be replaced. The blocks with special specifications can be customized.


Specification

MBINT-100

MBINTD-100

	MBINT-100	MBINTD-100
Temp. control range	RT. +5 °C~100 °C	0 °C~100 °C (ambient temperature \leq 20 °C) 4 °C~100 °C (ambient temperature \leq 25 °C) 10 °C~100 °C (ambient temperature \leq 30 °C)
Temp. uniformity	≤ 0.5 °C	≤ 0.5 °C
Timer range	1 min~99 h59 min	1 min~99 h59 min
Temp. control accuracy	± 0.5 °C	± 0.5 °C
Display accuracy	± 0.1 °C	± 0.1 °C
Shaking speed	200~1500 rpm	200~1500 rpm
Heating time (40 ~ 100 °C)	≤ 10 min	≤ 15 min
Refrigeration time (detected at 25 °C ambient temperature)	----	≤ 20 min (decrease from RT. to RT.-20 °C) ≤ 15 min (decrease from 100 °C to 20 °C)
Mixing orbit	2 mm	2 mm
Dimension (mm)	300x220x170	300x220x170
Weight	7 kg	8.5 kg

MBINT-100 / MBINTD-100 Suitable Block

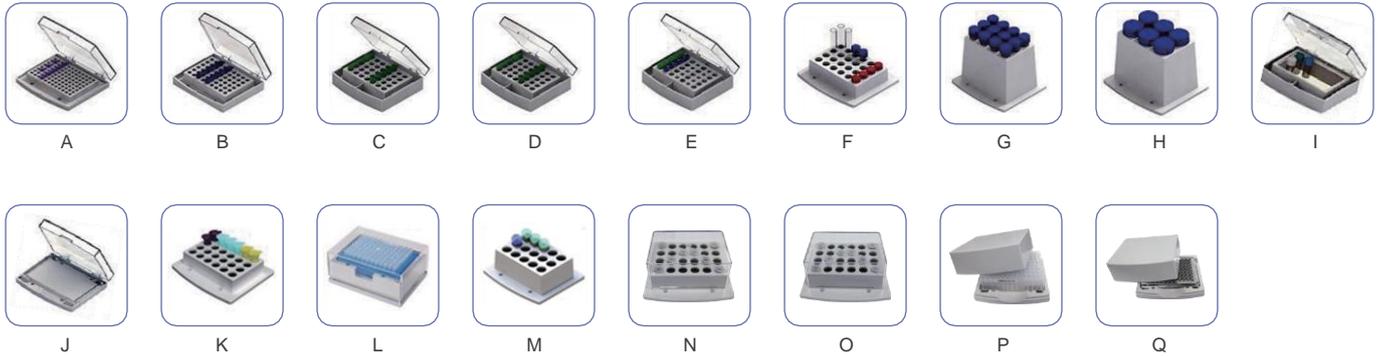

Ordering Information

Code	Description
MBINT-100	MBINT-100 thermo shaker incubator, with a block; AC220 V/AC120 V, 50/60 Hz, 150 W
MBINTD-100	MBINTD-100 thermo shaker incubator, with a block; AC220 V/AC120 V, 50/60 Hz, 250 W

Code	Type	Description	Max. speed	Max. Temp.
MBINT-100A	A	96x0.2 mL tubes	1500 rpm	100 °C
MBINT-100B	B	54x0.5 mL tubes	1500 rpm	100 °C
MBINT-100C	C	35x1.5 mL tubes	1500 rpm	100 °C
MBINT-100D	D	35x2.0 mL tubes	1500 rpm	100 °C
MBINT-100E	E	15x0.5 mL+20x1.5 mL tubes	1500 rpm	100 °C
MBINT-100F	F	24xDia.≤Φ12 mm tubes	1200 rpm	100 °C
MBINT-100G	G	12x15 mL Falcon tube	750 rpm	100 °C
MBINT-100H	H	6x50 mL Falcon tube	750 rpm	100 °C
MBINT-100I	I	103x67x30 mm rectangular bath block	1500 rpm	100 °C
MBINT-100J	J	96x0.2 mL microplate	1500 rpm	100 °C
MBINT-100K	K	24x5 mL tubes	1200 rpm	100 °C
MBINT-100L	L	96 deep-well microplate	800 rpm	80 °C
MBINT-100M	M	15x5 mL Eppendorf tubes	1200 rpm	100 °C
MBINT-100N	N	24x2 mL tubes	1200 rpm	100 °C
MBINT-100O	O	24x1.5 mL tubes	1200 rpm	100 °C
MBINT-100P	P	96x1000 µL deep-well plate	1200 rpm	100 °C
MBINT-100Q	Q	MTPs deep-well plate	1200 rpm	100 °C